

# ascolights™

Lighting Design | Consultancy | Supply

## PROFILES




To find out full range please contact us.

PROFILE/ m




ENDCAP

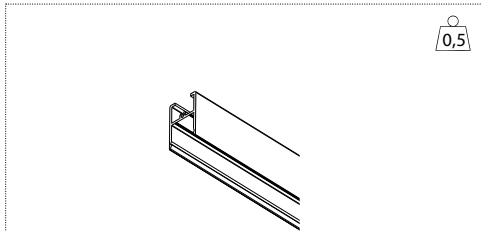

0,5

TEXT. WHITE	952047
ANODISED ALU	952012

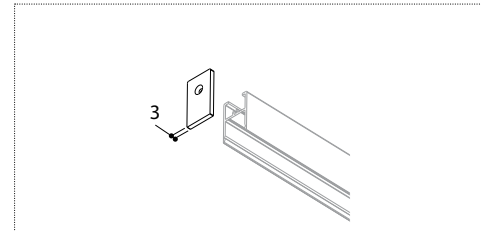


TEXT. WHITE	952247
ANODISED ALU	952212

PLASTER PROFILE/ m




ENDCAP FOR PLASTER PROFILE

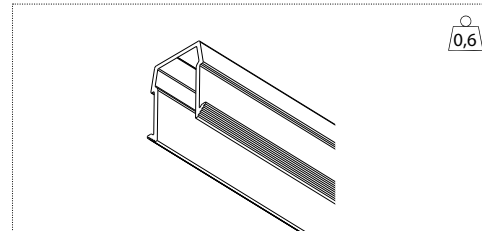


0,6

ALU	952035
PROFILE FOR RECESSED INSTALLATION OF 1U	

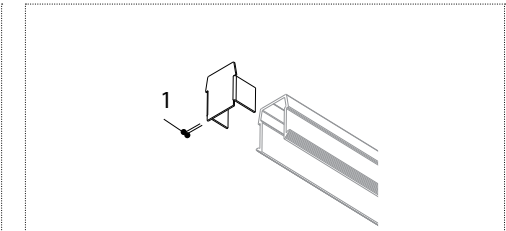


ALU	952235
-----	--------

STRAIGHT CONNECTION

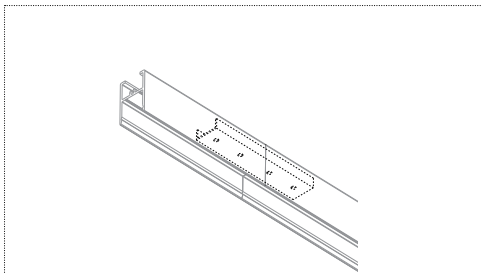


STRAIGHT CONNECTION	952060
---------------------	--------

CORNER

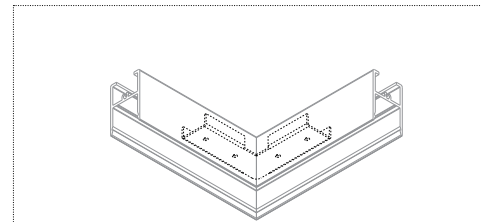

CORNER 90°	952070
CORNER 135°	952080
CORNER ON REQUEST	952090


MOUNTING BRACKETS FOR RECESSED INSTALLATION

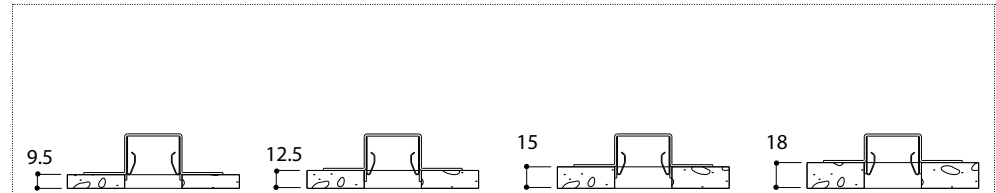

2 mounting brackets per m (type according to ceiling thickness)


9,5 mm	12,5 mm	15 mm	18 mm
952900	952901	952902	952903

MOUNTING SPRINGS FOR SURFACE INSTALLATION

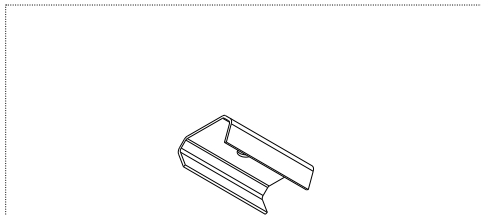


2 mounting springs per m

SPRING	952905
--------	--------

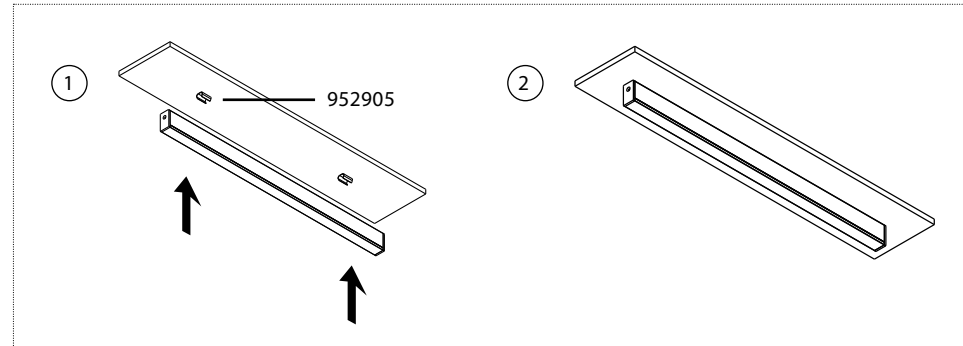

CUT OUT DIMENSIONS

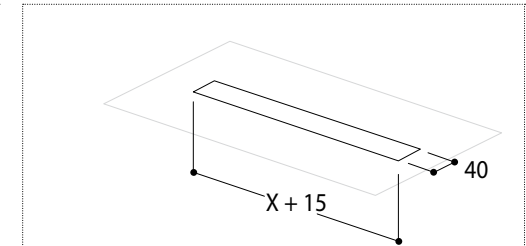


X = Length of profile (measured without endcaps)  
Installation height: 50 mm

# MODULE LEDLINE/M



FROSTED POLYCARBONATE S DIFFUSER INCLUDED

LEDLINE can be cut every 50mm



	3000K HO	6250K HO	RED	YELLOW	GREEN	ROYAL BLUE	RGB
	952200	952300	952400	952500	952600	952700	952800
	19,2W/ m	19,2W/ m	4,8W/ m	4,8W/ m	4,8W/ m	4,8W/ m	14,4W/ m
	816 lm/ m	1020 lm/ m	162 lm/ m	220 lm/ m	114 lm/ m	51 lm/ m	480 lm/ m



24V DC

Converter p.325  
RGB Driver p.324



## SUSPENSION SINGLE

dia20 h=28

1 suspension/ 1,5 m profile  
min. 2 suspensions

2,25 m

TEXT. WHITE	952041
ANO	952040

## CABLE + BASE

68 mm

80

32

To be used as access point for converter

	MONOCOLOR	RGB
TEXT. WHITE	944009	944011
BRUSHED ALU	944008	944010

## SECTION VIEW

35

20














SECTION VIEW S

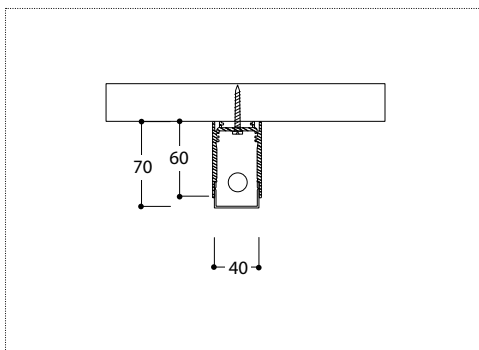


SECTION VIEW H

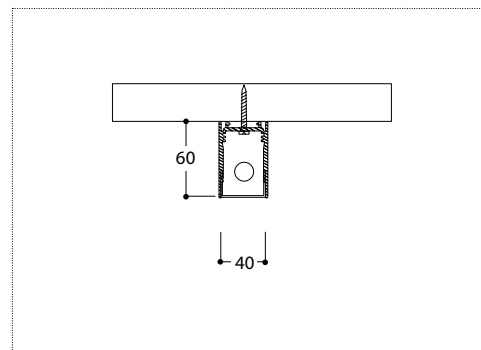

SUSPENSION SINGLE

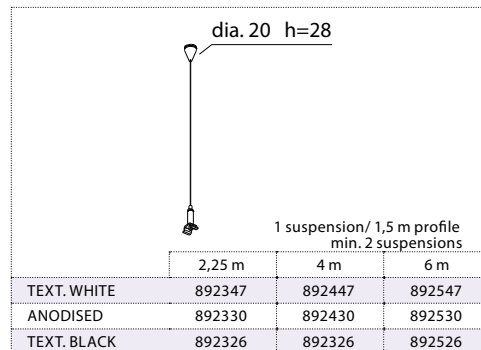

WALL BEAM

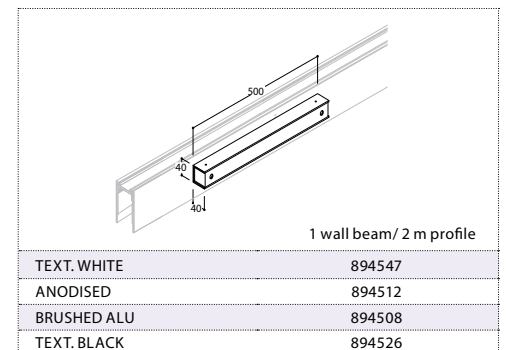









## MODULE LEDLINE/M



	3000K HO	6250K HO	RED	YELLOW	GREEN	ROYAL BLUE	RGB
DIFFUSERS	819020	819010	819040	819050	819060	819080	819090
DIFFUSER H	819025	819015	819045	819055	819065	819085	819095
	19,2W/m	19,2W/m	4,8W/m	4,8W/m	4,8W/m	4,8W/m	14,4W/m
	816 lm/m	1020 lm/m	162 lm/m	220 lm/m	114 lm/m	51 lm/m	480 lm/m

LEDLINE can be cut every 50 mm

24V DC

## MODULE POWERLED 1W



POWERLED 1W 30°  
230 V - 50Hz

MODULE	3000K	3000K HO	6250K	6250K HO
	815200	815211	815210	815201
810147	COVER TEXT. WHITE P/M	810126	COVER TEXT. BLACK P/M	
810112	COVER ANO P/M			
810108	COVER BRUSHED ALU P/M			

## MODULE SINGLE JACK



230 V - 50Hz  
dimable L,C  
MAX 1X50W

814130			
810147	COVER TEXT. WHITE P/M	810126	COVER TEXT. BLACK P/M
810112	COVER ANO P/M		
810108	COVER BRUSHED ALU P/M		


## MODULE DOUBLE JACK




230 V - 50Hz  
dimable L,C  
MAX 2X50W

814230			
810147	COVER TEXT. WHITE P/M	810126	COVER TEXT. BLACK P/M
810112	COVER ANO P/M		
810108	COVER BRUSHED ALU P/M		


## JIBE 70 JACK

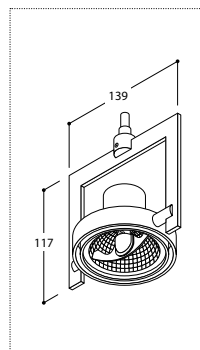


## MEC 111 JACK

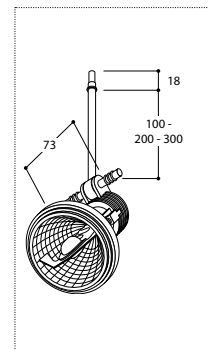


## JIBE 50 JACK

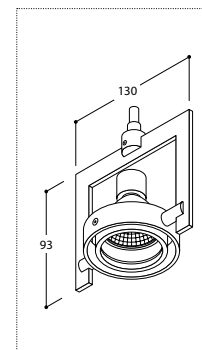


## JIBE 111 JACK

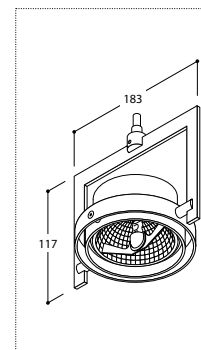

## MONO DOSTEC JACK

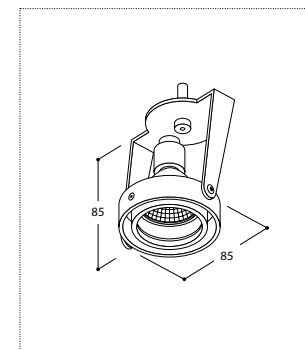

## SHUTTLE JACK

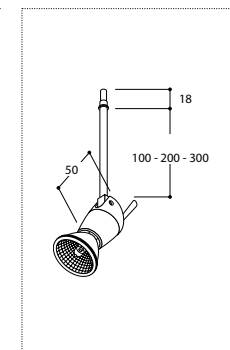






SEAMLESS T5 MODULES DOWN\*



T5S LAMPS	DIFFUSER	NOT DIMMABLE	DIMMABLE 1 - 10V	TOUCH/ DALI DIMMABLE	MODULE LENGTH
2 x 14 - 24W	FROSTED POLYCARBONATE	982160			585 mm
	PRISMATIC POLYCARBONATE	982170			
2 x 21 - 39W	FROSTED POLYCARBONATE	982360	982367	982369	885 mm
	PRISMATIC POLYCARBONATE	982370	982377	982379	
2 x 28 - 54W	FROSTED POLYCARBONATE	982560	982567	982569	1185 mm
	PRISMATIC POLYCARBONATE	982570	982577	982579	
G5	*gear inclusive				

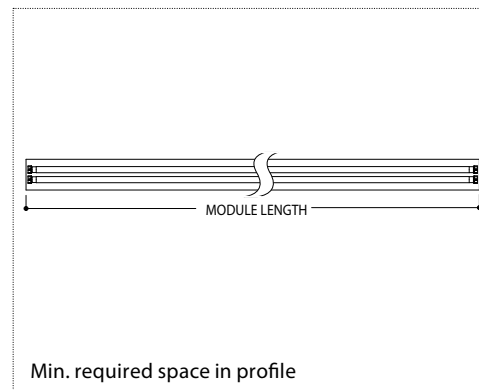


















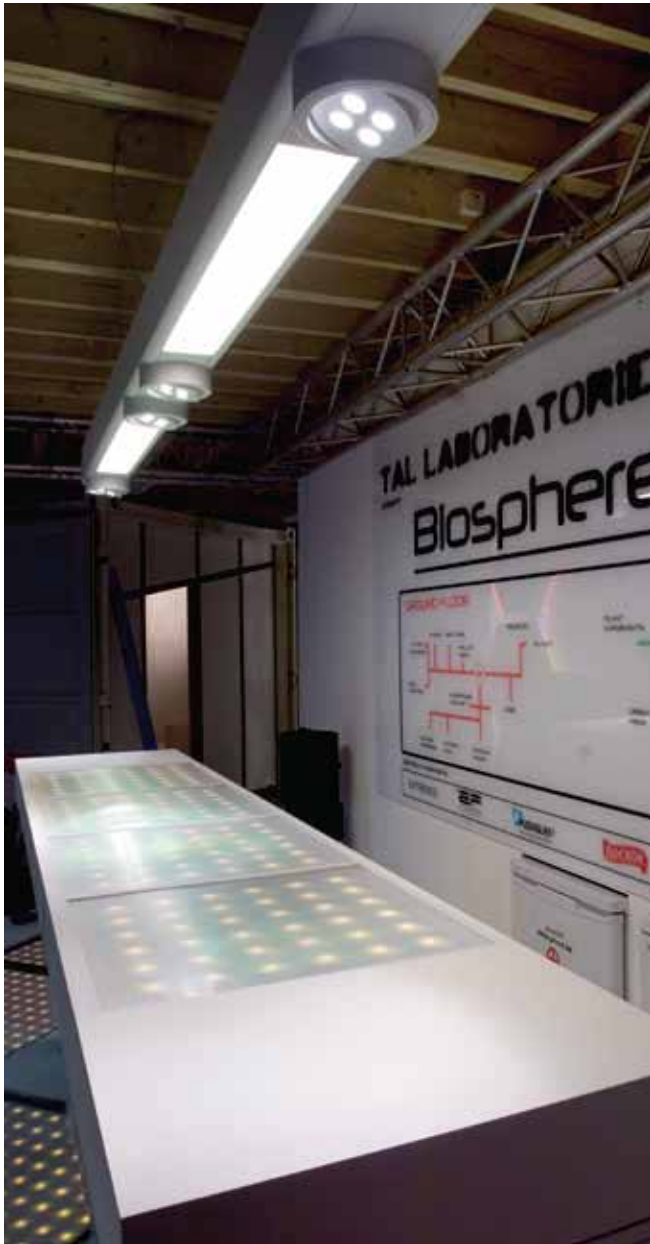

MODULE B4



MODULE 1 PASCAL



MODULE BAP



MODULE 1 QR111



MODULE 1 HIPAR111



MODULE QT-DE12



**For more details contact us:**

**Manchester Office:** 0161 207 0212

**London Office:** 0207 118 0242

[www.ascolifestyle.co.uk](http://www.ascolifestyle.co.uk)

**ascolights**<sup>TM</sup>

Lighting Design | Consultancy | Supply