



Product 246. Duna In Downlight

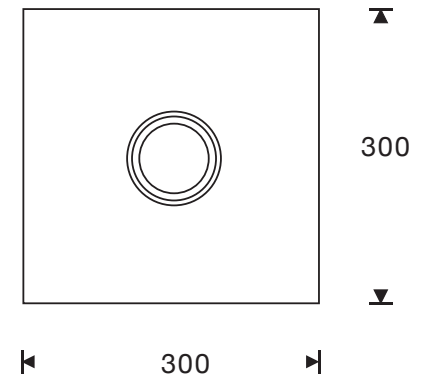

IP 20      

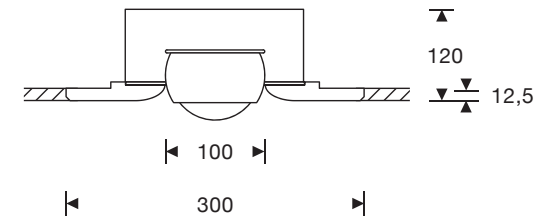

LED moulded spotlight with spherical head and lens optics, for ceiling mounting. Thanks to its unique ball joint principle, the Duna in can be aligned in any direction. Plastering element (can be painted) for seamless installation into suspended ceilings; unique "click mount" system for tool-free fitting of the lamp head into the pre-installed element. Power supply with external power source (driver). Head can be taken off for maintenance; replaceable LED.

Power 18 W; dimmable via customer-supplied dimmable ballast.

Lighting effect can be changed through optional inserts; dichroitic colour filter can be additionally inserted. Lamp head available in different surface styles.

materials light fixture
aluminium, zinc
chrome-plated or
painted

materials inserts
optical plastic, glass

surface head
chrome, matt chrome,
glossy black (nero),
matt black,
glossy white (bianco),
matt white

plastering plate
fibre-reinforced plaster

rotatability body
360°

pivot angle
30°

mounting
ceiling (pitch mounting
up to 30° possible)

weight
head max. 0,5 kg
plastering element 1,5 kg

lighting effects C
see cutsheet page 2

dimming function
with trailing edge

phase dimmer, push
button, DALI or 1-10 V
(depends on driver)

ECG (driver)
external
driven by constant
current source
500 mA / > 40 V DC